

FIG. 2

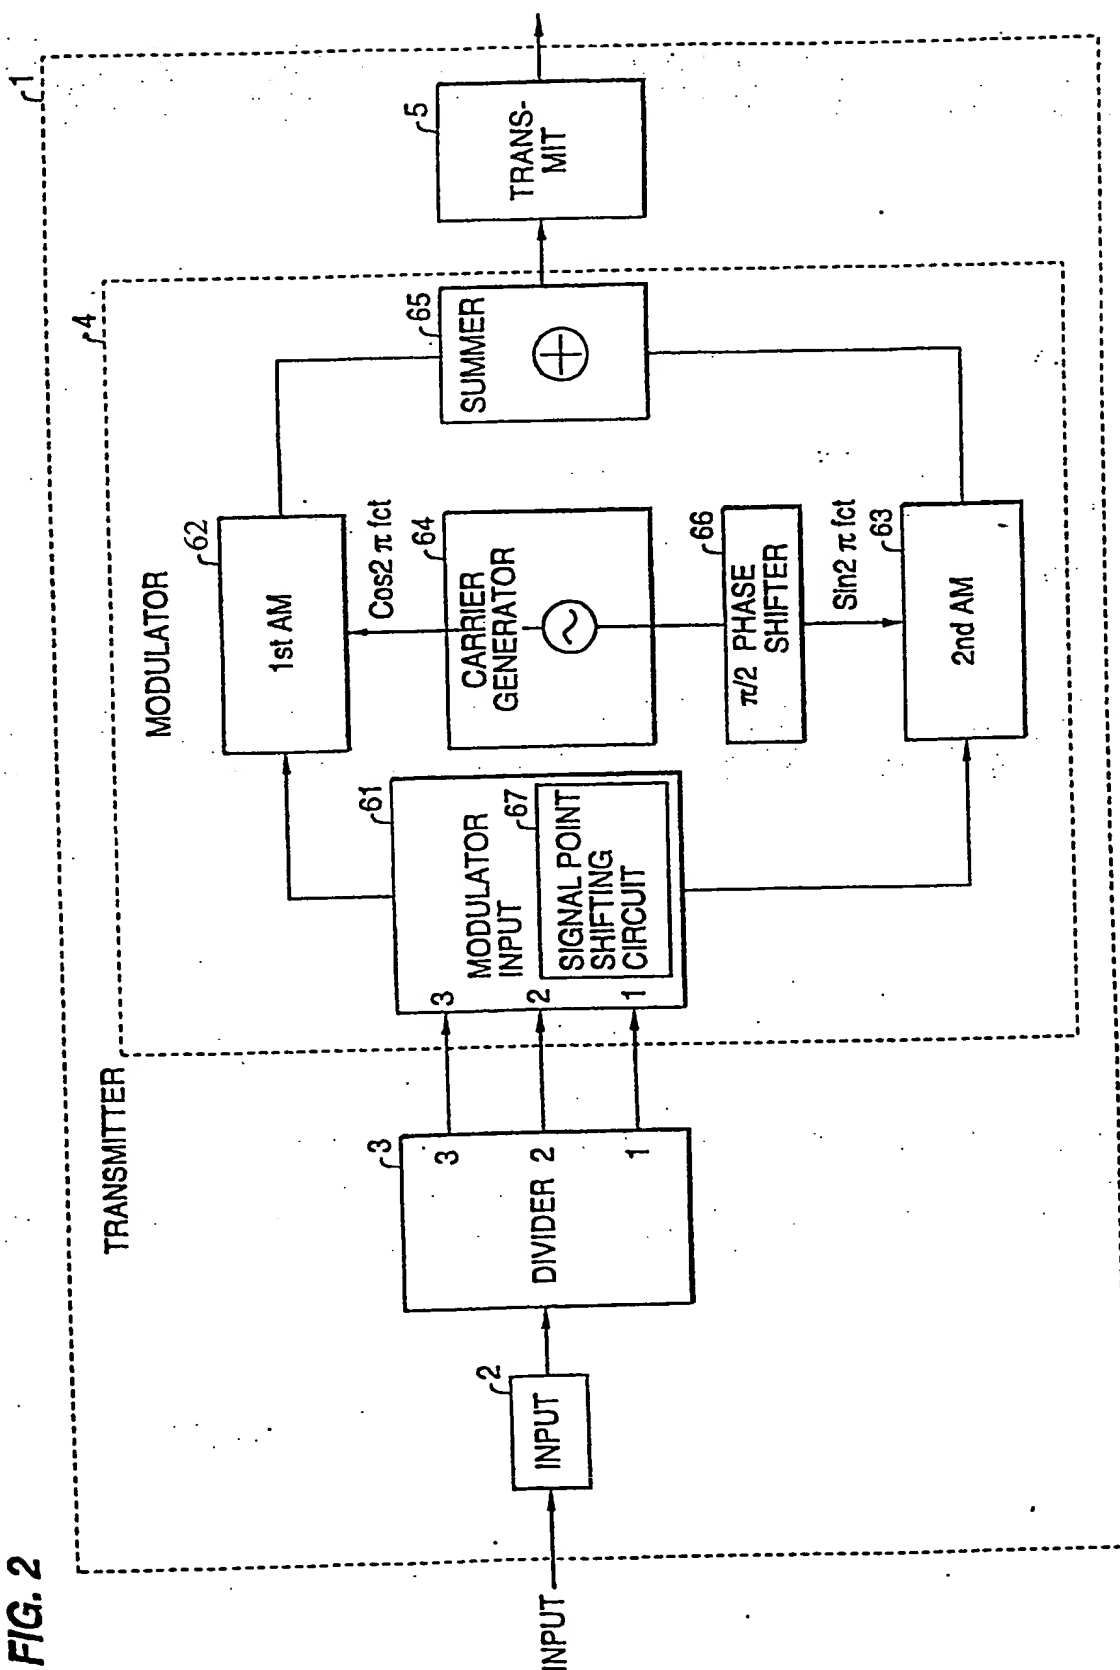


FIG. 17

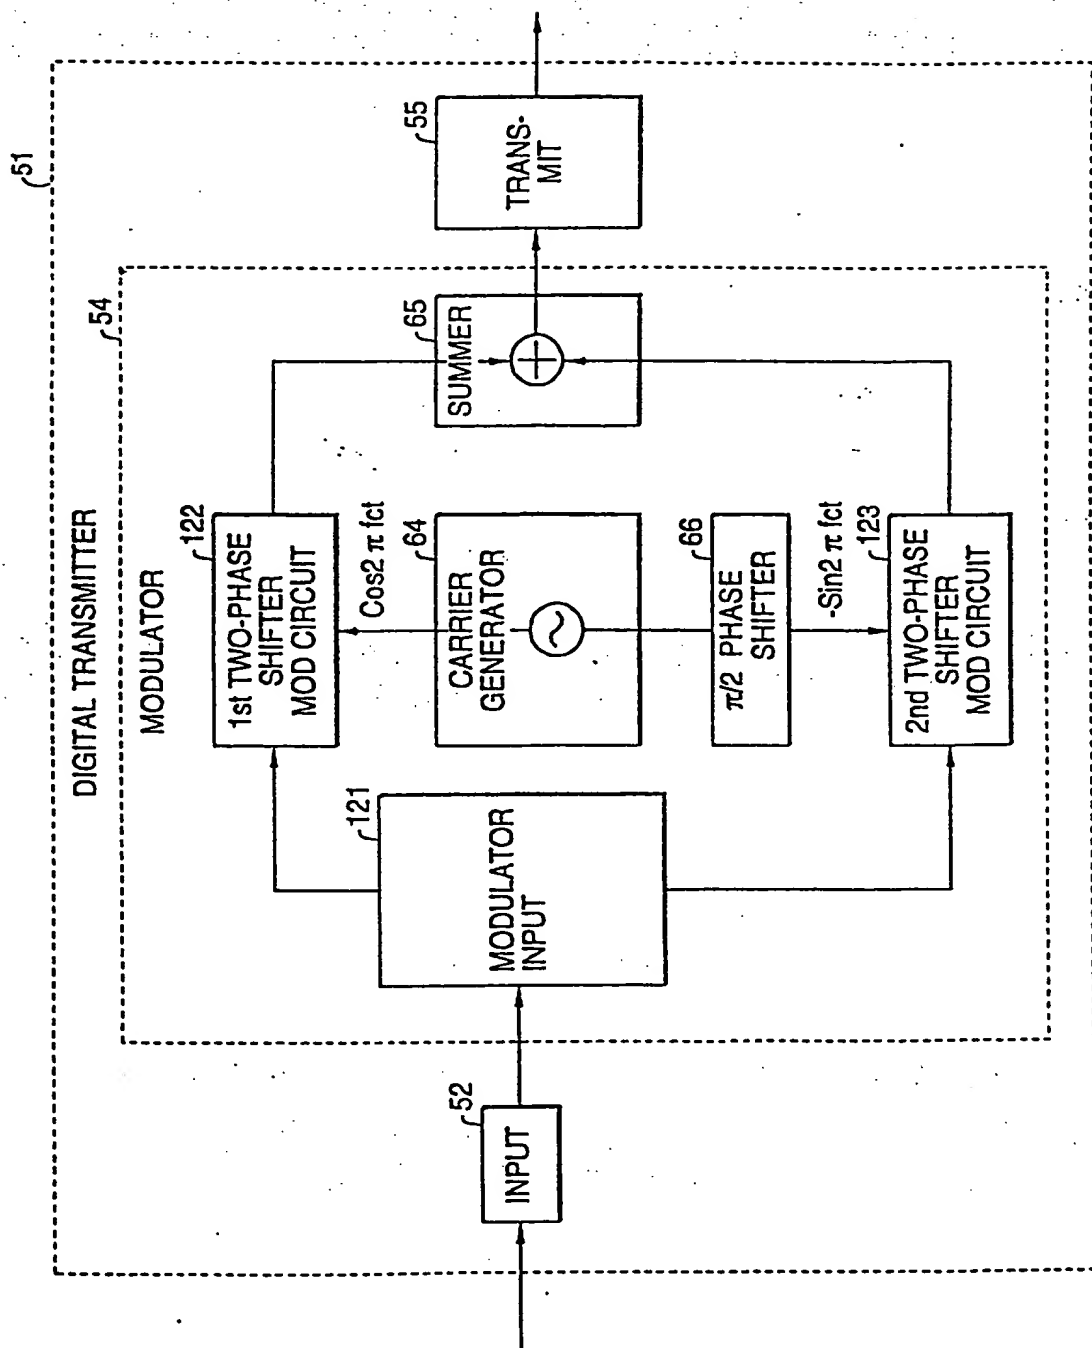


FIG. 29

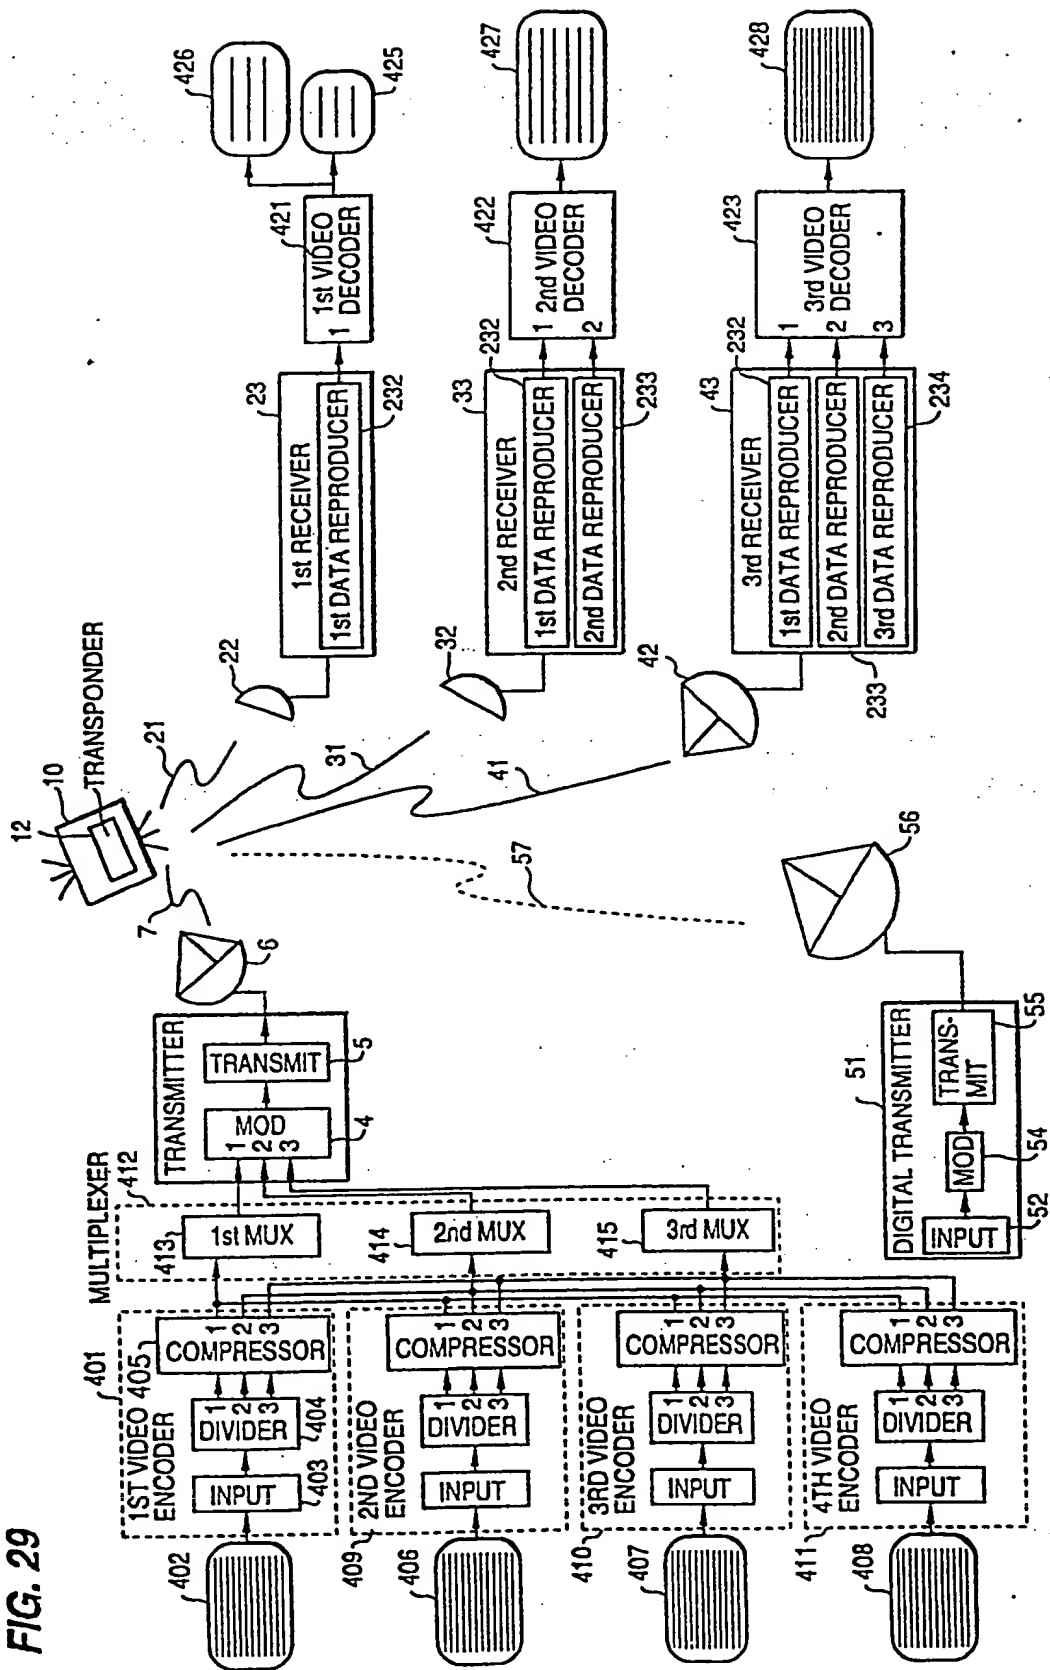


FIG. 48


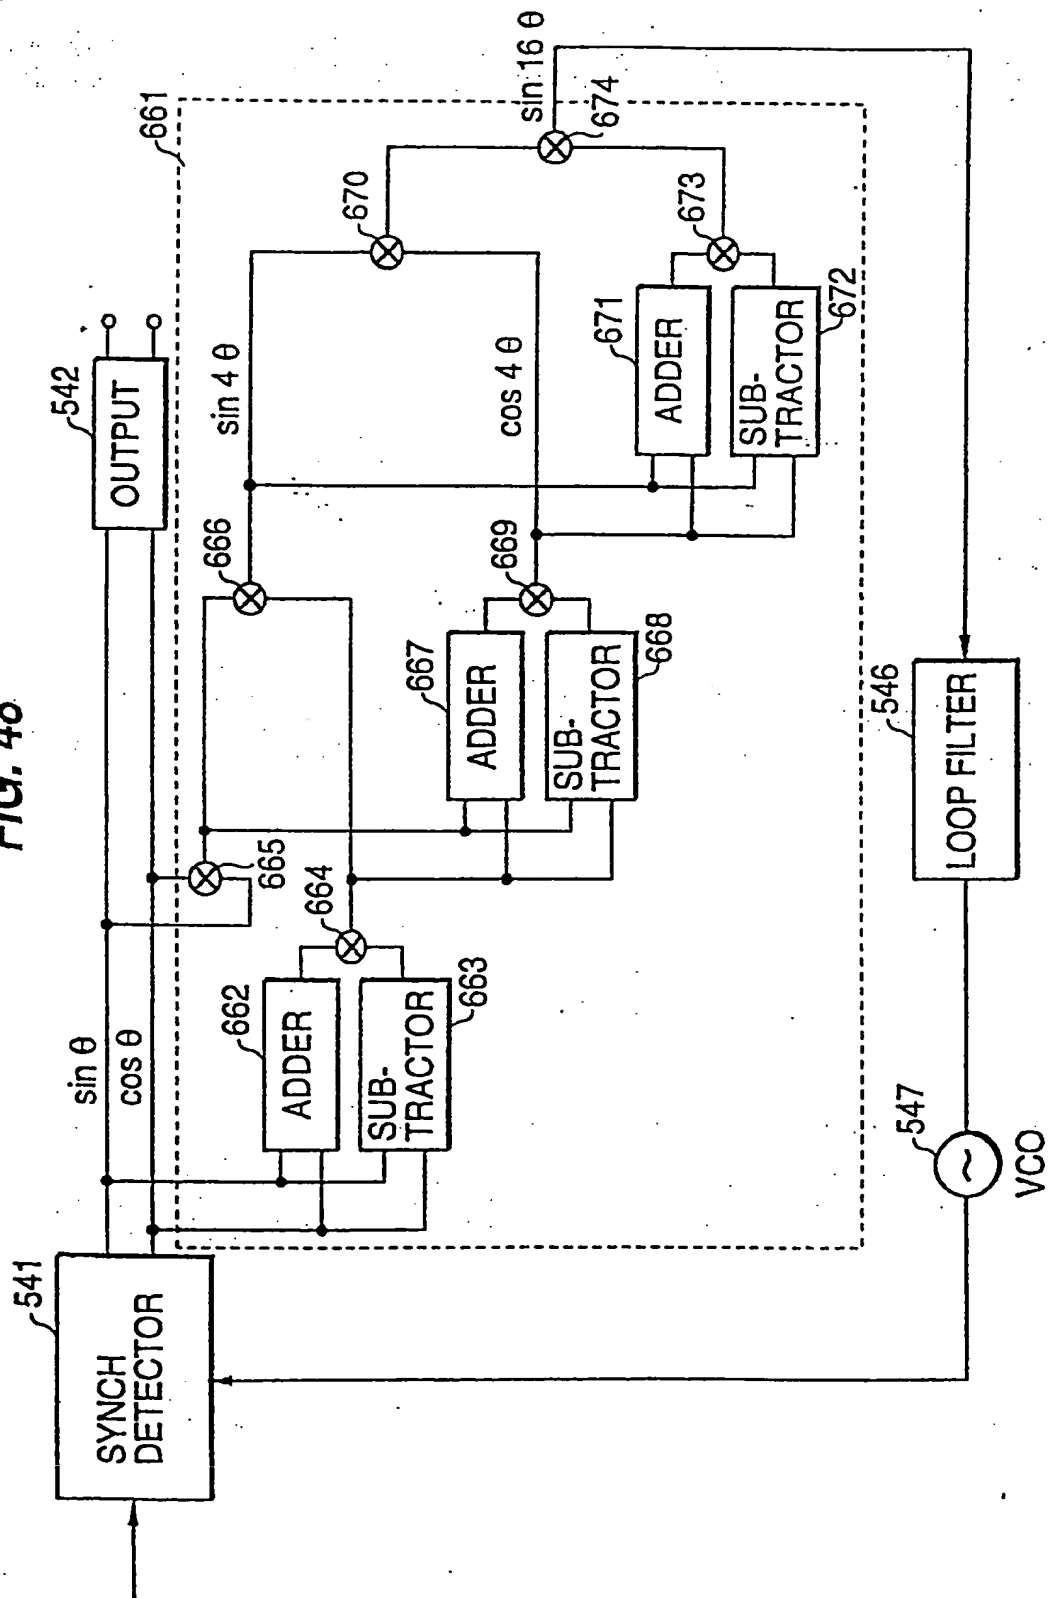


FIG. 65

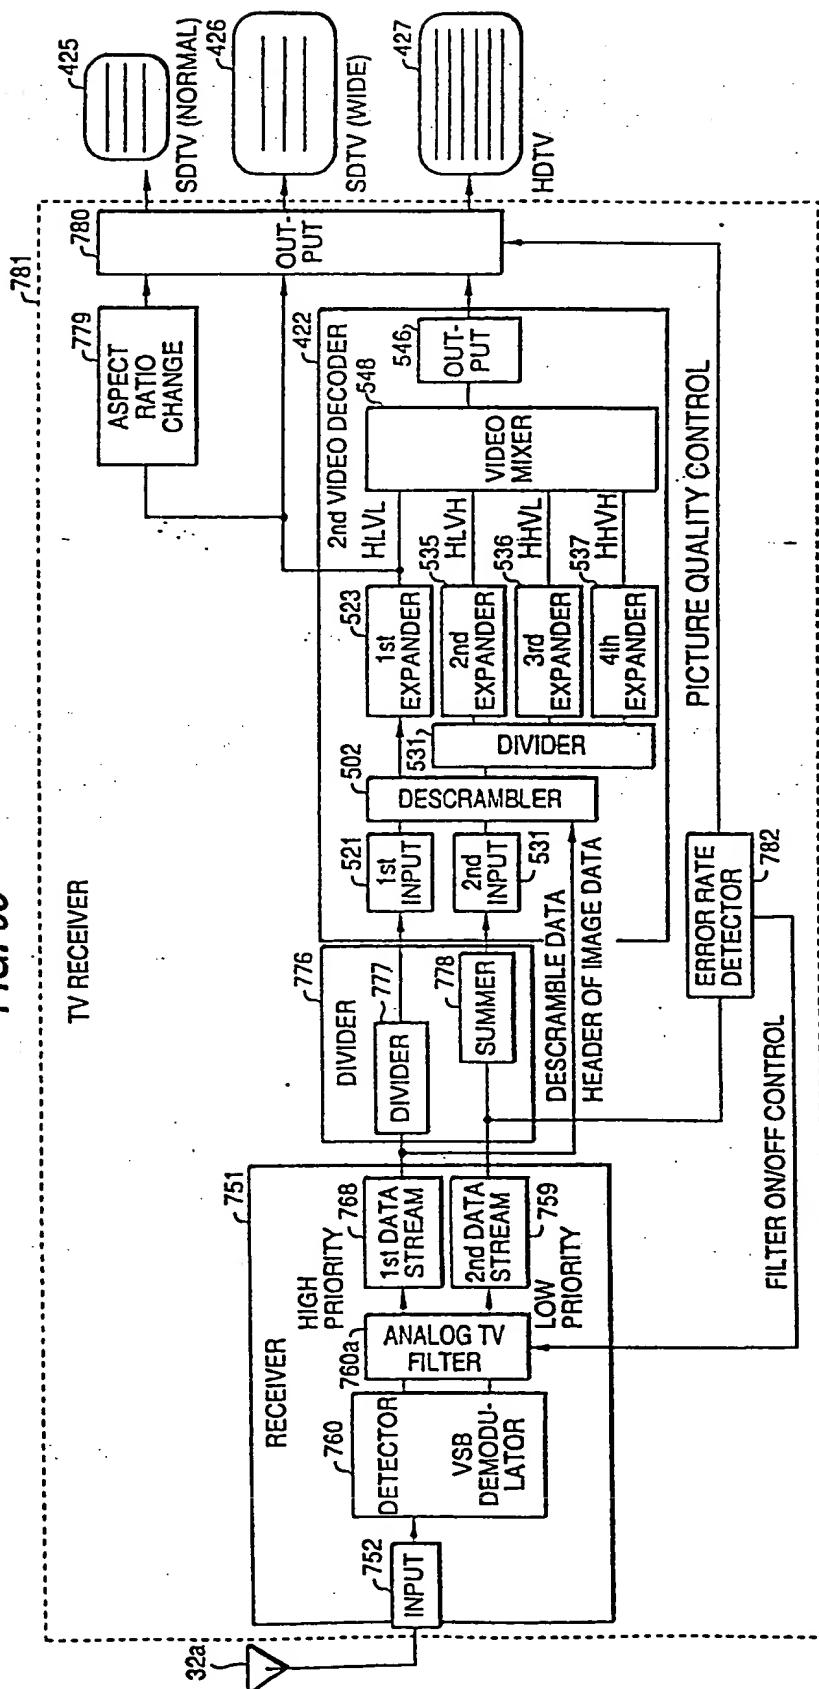

MAY 07 2003
 PATENT & TRADEMARK OFFICE 8625

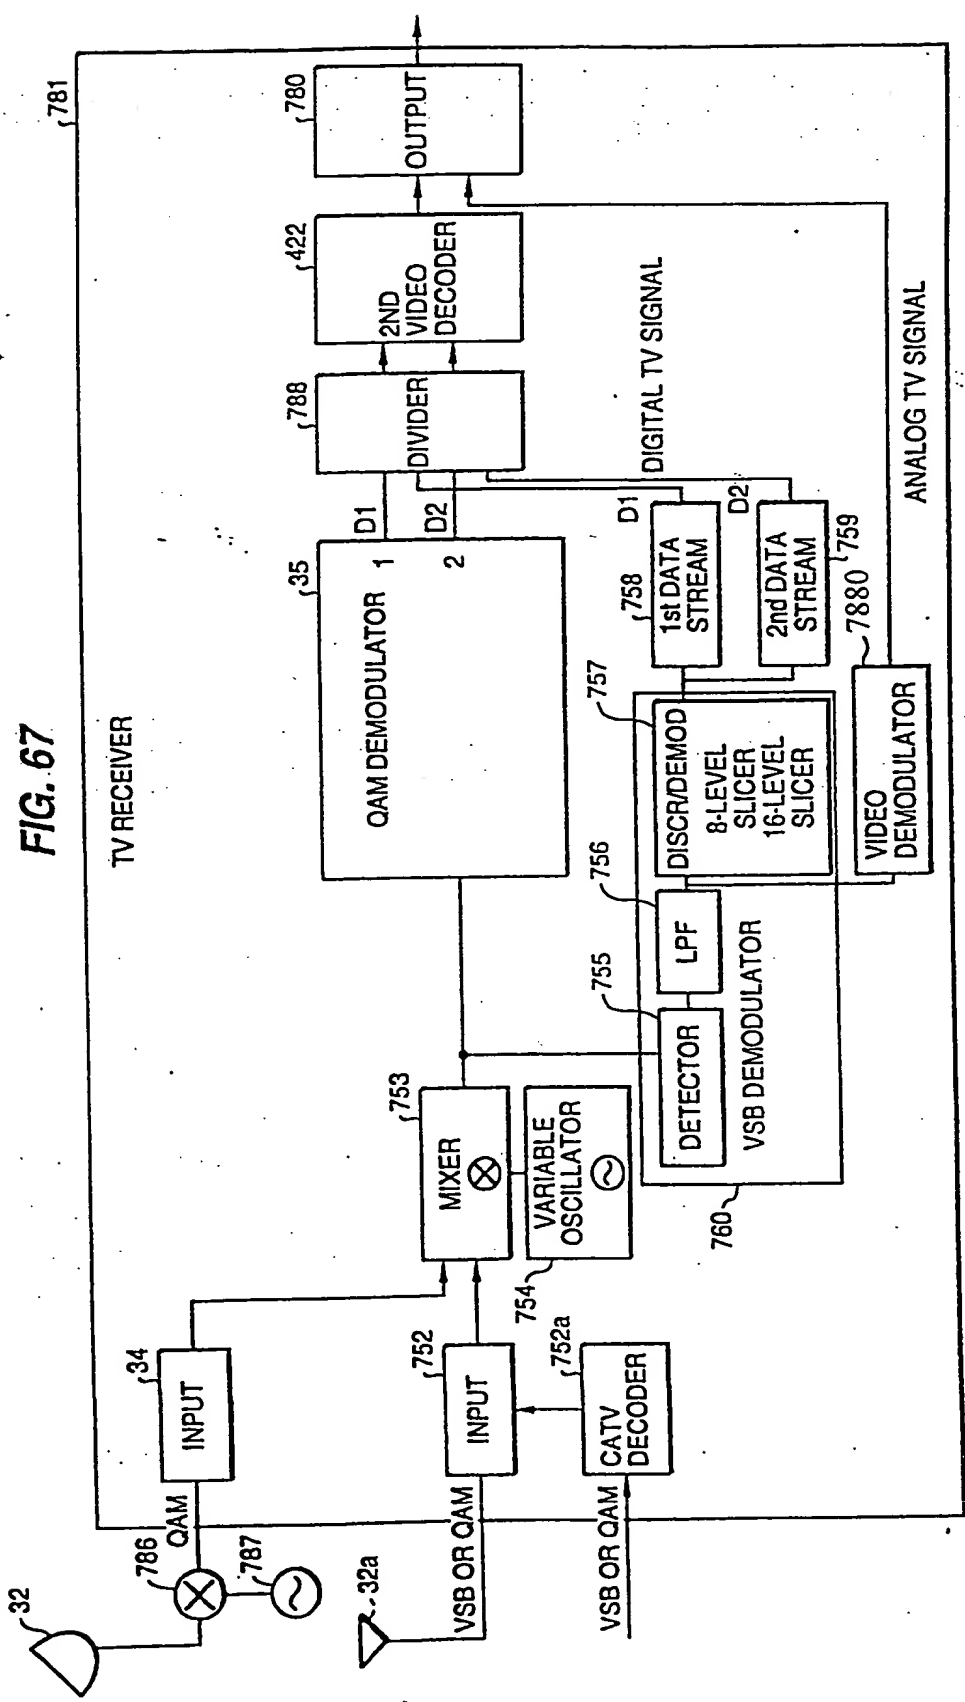


FIG. 93



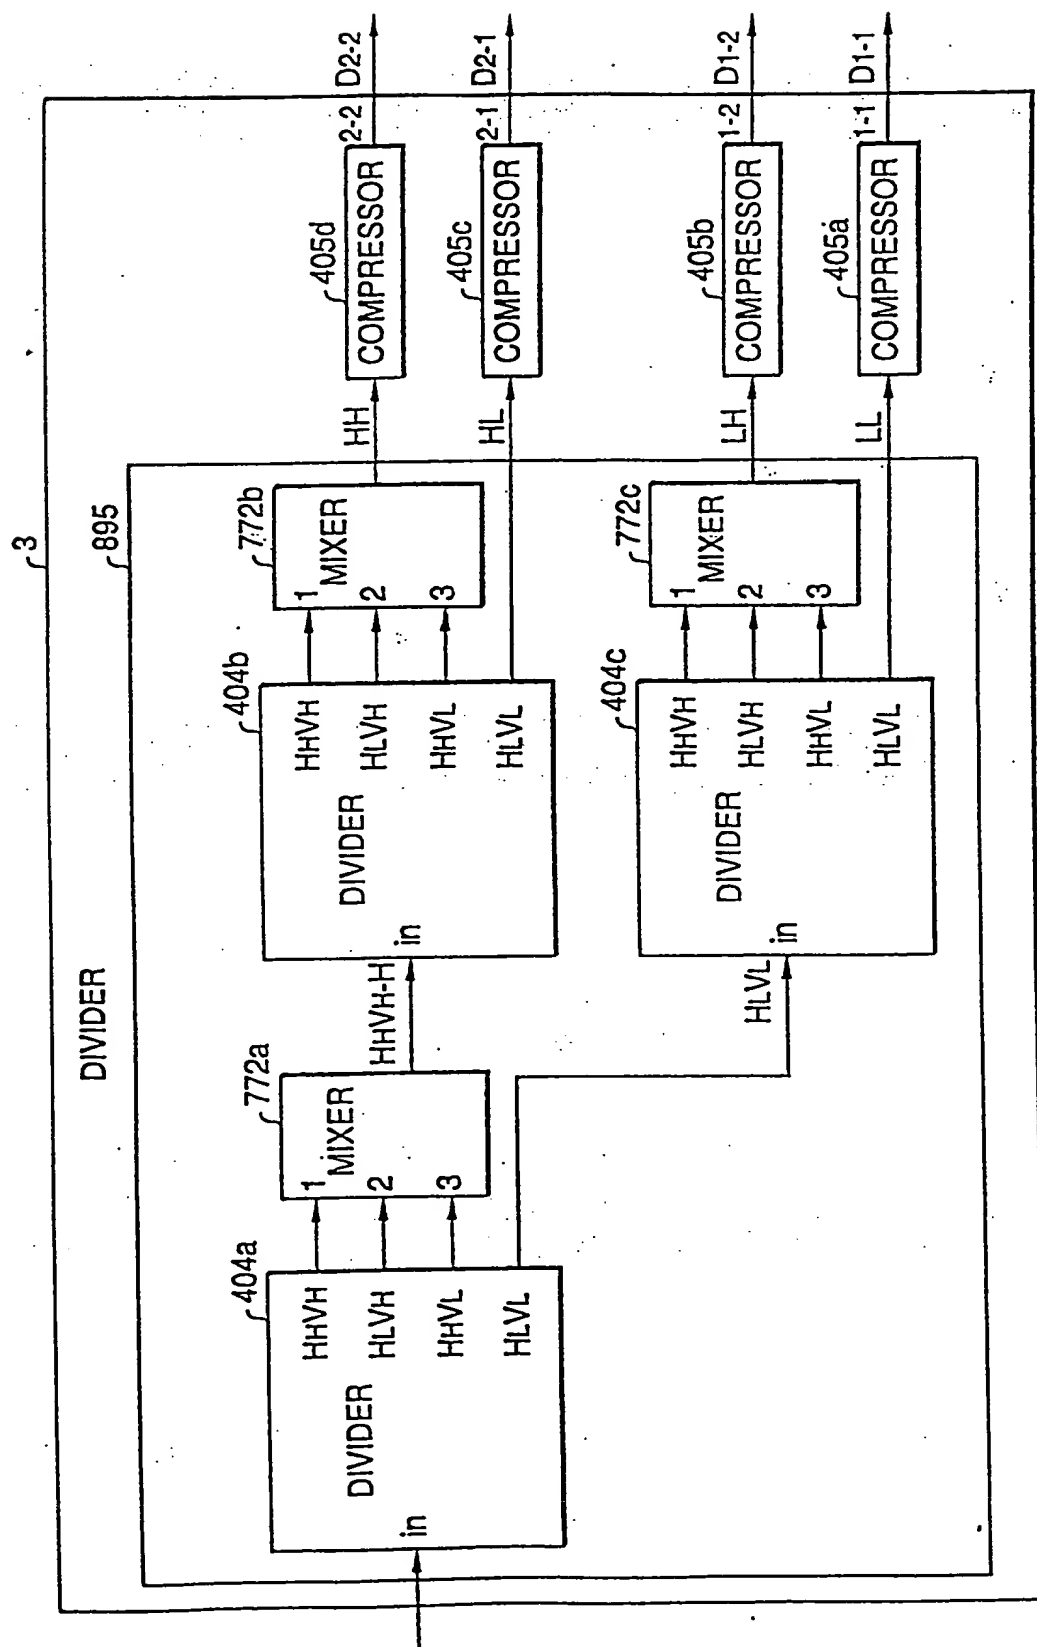


FIG. 112


SUBCHANNEL-1 (SRQAM:D1 = 2bit)

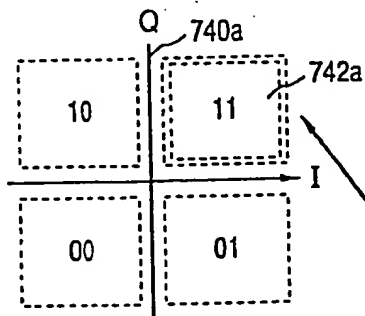


SUBCHANNEL-2 (16-SRQAM:D2 = 2bit)

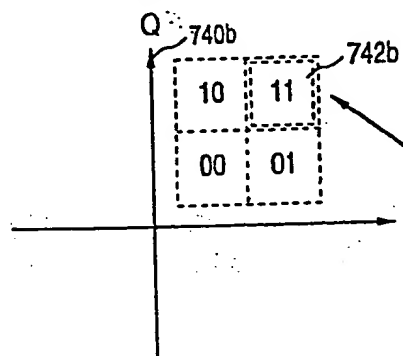

SUBCHANNEL-3 (64-SRQAM:D3 = 2bit)



SUBCHANNEL-4 (256-SRQAM:D4 = 2bit)

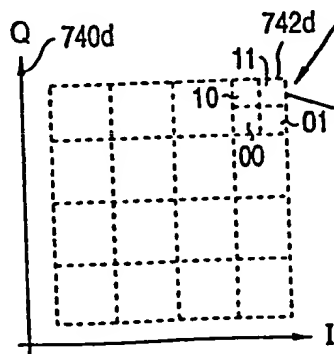


CODE WORD-1

CODE WORD-2

CODE WORD-3

CODE WORD-4

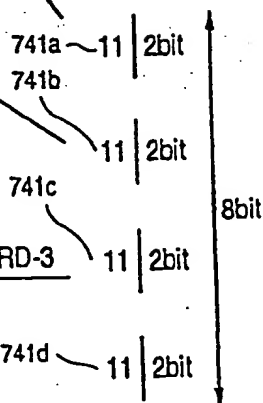

SIGNAL POINT
 CODE WORD
 11 11 11 11

FIG. 131

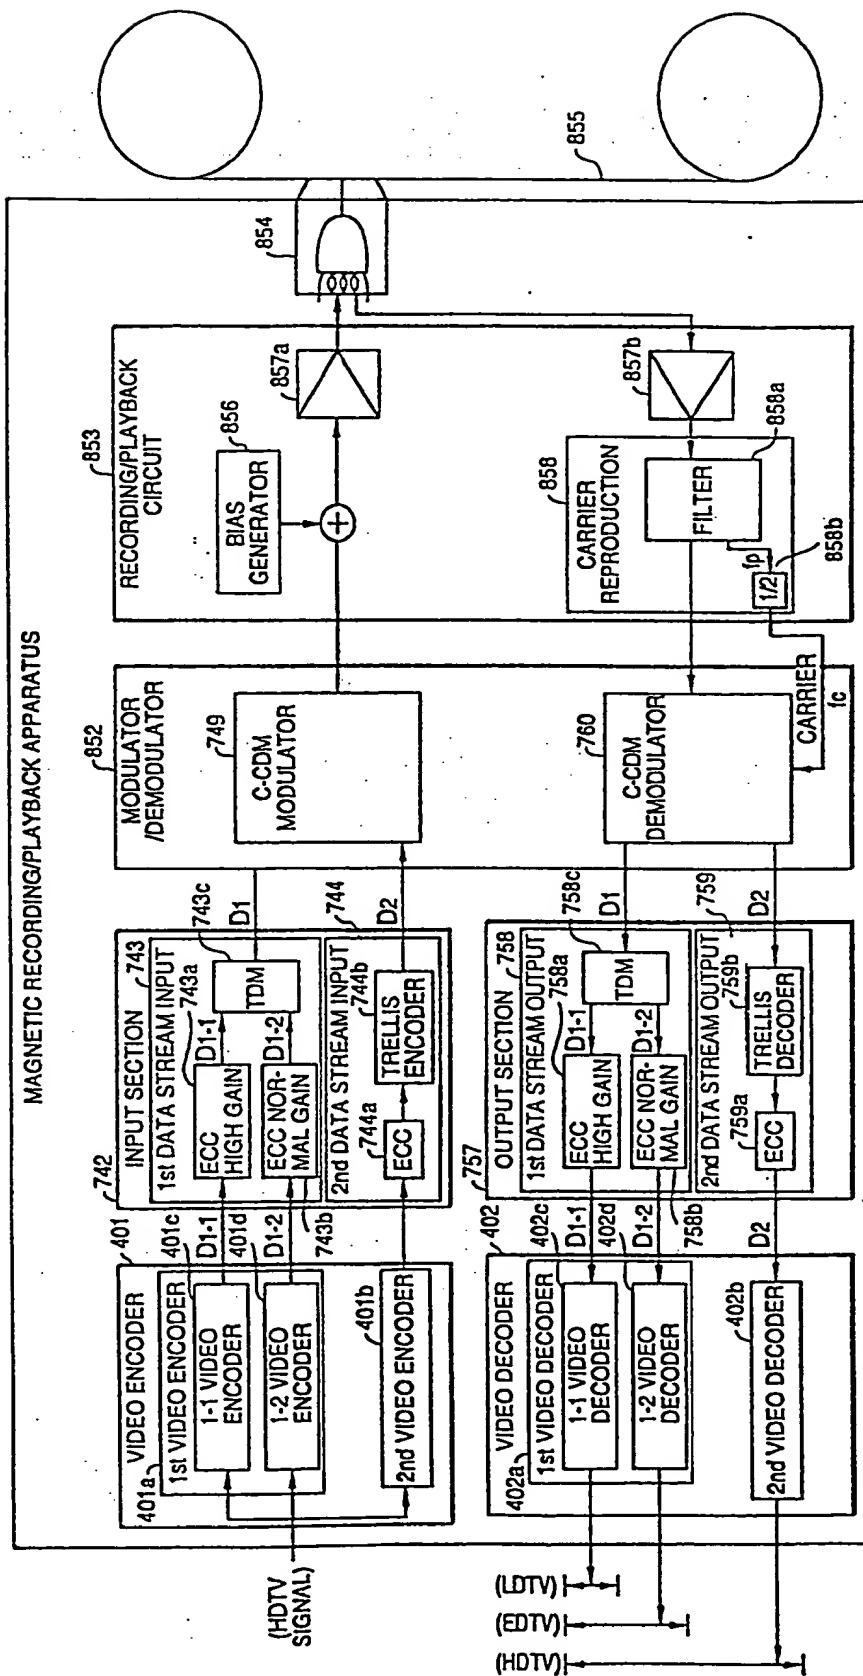


FIG. 138

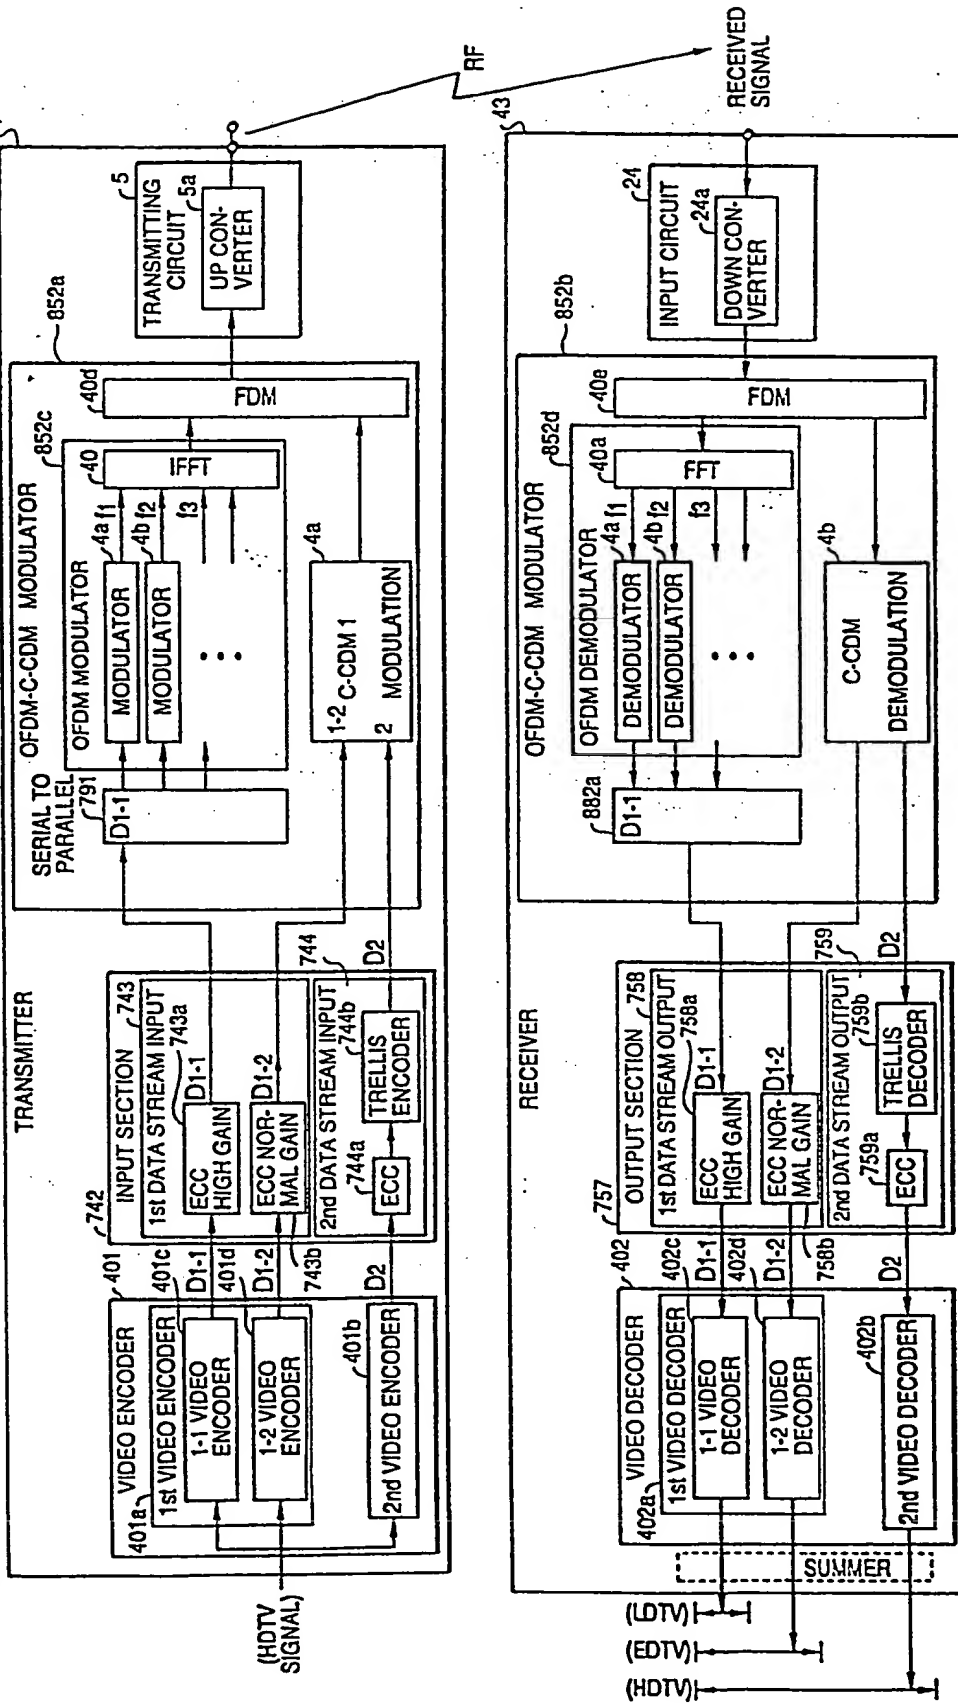
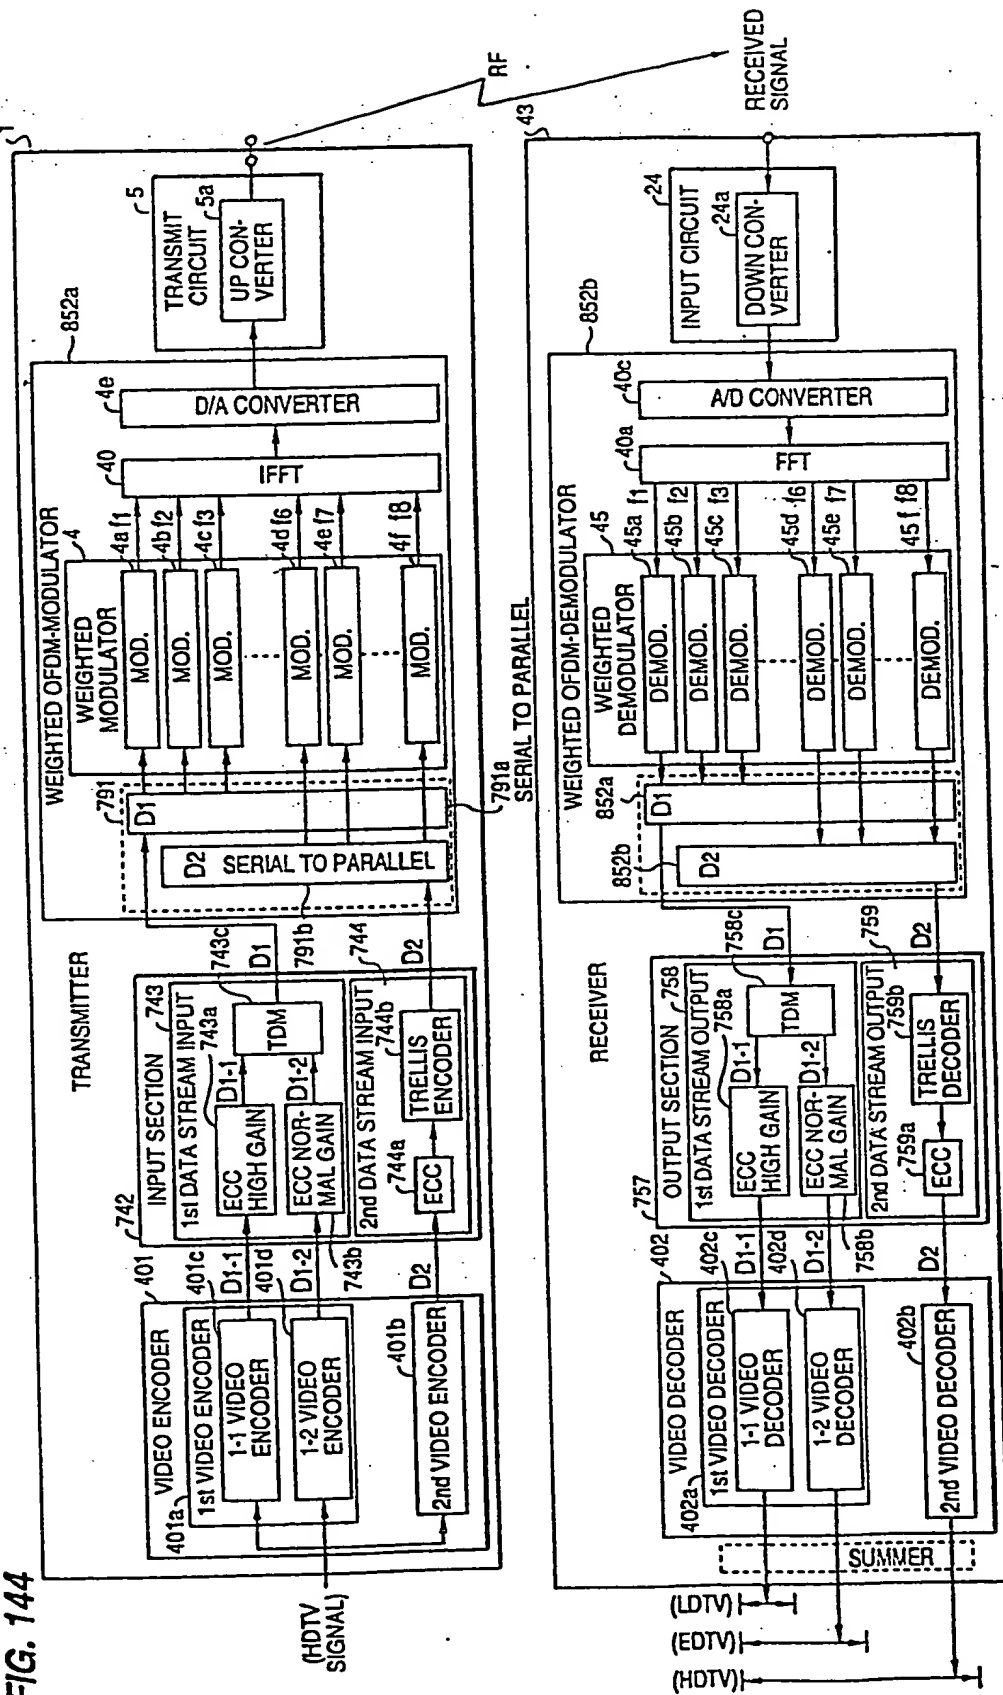


FIG. 144






FIG. 169

COMPARISON OF REDUNDANCY

